



INSTALLATION

THROTTLE ASSIST MATCHING BAR END WEIGHT 6288

FITS MODELS: INTENDED FOR USE WITH OEM OR KURYAKYN ISO, ISO-FLAME & TRANSFORMER GRIPS. REQUIRES A 7/8" HOLE IN GRIP END.

HONDA: '96-'07 VLX600 SHADOW, '98-UP SHADOW 750 ACE/AERO/SPIRIT, '97-'07 SHADOW 1100 ACE/AERO/SABRE/SPIRIT, '94-'03 750 MAGNA, '03-UP VTX1300 (ALL MODELS), '02-'08 VTX1800 (ALL MODELS), '97-'04 VALKYRIE, '95-UP ST1100/ST-1300

KAWASAKI:

'06-UP VULCAN 900, '03-'08 VULCAN 1600 CLASSIC & MEAN STREAK

SUZUKI:

'97-UP BOULEVARD C/M/S50 & MARAUDER, '04-'08 INTRUDER 1400/S83, '98-UP INTRUDER 1500/C90

VICTORY:

'04-UP KINGPIN (WITH KÜRYAKYN ISO-GRIPS), '06-UP HAMMER (WITH KÜRYAKYN ISO-GRIPS), '04-UPVEGAS – ALL MODELS (WITH KÜRYAKYN ISO-GRIPS)

YAMAHA:

'98-UP V-STAR 650 CUSTOM & CLASSIC, '96-'00 ROYAL STAR

HARLEY-DAVIDSON:

ALL H-D MODELS WITH 1" OR 7/8" HANDLEBARS WITH HOLLOW BAR ENDS AND OEM OR KÜRYAKYN ISO®- & TRANSFORMER™ STYLE GRIPS (EXCEPT '08-UP TOURING MODELS WITH ELECTRONIC THROTTLE, HEATED GRIPS OR AIR RESERVOIRS IN HANDLEBARS.

UNIVERSAL:

FOR ALL MODELS WITH 7/8" OR 1" HOLLOW BARS WITH OPEN ENDS

PARTS INCLUDED

- 1 O-Ring
- 1 Bar End Weight
- 1 Threaded Wedge
- 3 Wedges
- 1 M6 x 1.0 x 90MM Socket Head Cap Screw (SHCS)
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of Hex Wrenches, Razor Blade, 7/8" (or larger) Drill Bit (applications with closed grip ends)

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
- Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Küryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Küryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Küryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA® All Rights reserved.

-cont.-

kuryakyn.com



PROCEDURE

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

KURYAKYN GRIPS

STEP 1 Remove the 4 bolts that hold the end cap to the end of the grip. (PIC 1)

STEP 2 Loosen the bolt at the end of the Bar End Weight enough to get the assembly in to the hole. Insert the assembly in the end of the grip. (PIC 2)

NOTE If loosened too far, the end of the Bar End Weight will come off and components may be lost.

STEP 3 Tighten the screw at the end of the Bar End weight until it does not spin in the end of the grip. Be careful not to over-tighten. (PIC 3)

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

STOCK GRIPS

STEP 1 Remove the bar ends and cut or drill at least a 7/8" (can be larger if necessary) hole in the end of the grip. (PIC 4)

NOTE Make sure that the cut area is smooth and free of any excess material. The grip should have adequate clearance to fit the Bar End Weight in the hole.

STEP 2 Loosen the bolt at the end of the Bar End Weight enough to get the assembly in to the hole. Insert the assembly in the end of the grip

NOTE If loosened too far, the end of the Bar End Weight will come off and components may be lost.


STEP 3 Test fit the Bar End Weight. It may be required to cut the grip material flush with the end of the grip sleeve/handlebar for best installation.

STEP 4 Tighten the screw at the end of the Bar End weight until it does not spin in the end of the grip. Be careful not to over-tighten.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Kuryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.

Ride On!

PIC. 1

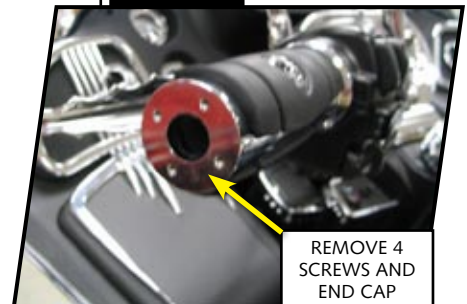

PIC. 2



PIC. 3



PIC. 4

