



HEADLIGHT VISOR

2182

**FITS: UNIVERSAL FOR 7" HEADLIGHTS WITH RETAINER RING
H-D MODELS WITH 7" HEADLIGHTS
YAMAHA: ALL '99-UP ROAD STAR MODELS (EXCEPT WARRIOR), ALL '98-UP V STAR 1100 MODELS**

PARTS INCLUDED

- 1 Headlight Visor
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.


TOOLS SUGGESTED

Set of hex wrenches, combination wrenches, and a screwdriver set.

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE

- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.
- STEP 2** Remove the stock headlight hardware. Unplug the headlight harness plug. Remove light from bike.
- STEP 3** Set light on a soft towel or equivalent to prevent any scratches.
- STEP 4** Remove the hardware that secures headlight bezel exposing the inner ring. **PIC. 1.**
- STEP 5** With the headlight bezel removed from the light, remove the hardware that secures the inner ring to the headlight assembly.
- STEP 6** Remove the inner ring from the light. Make note which way the tabs line up.
- STEP 7** With the inner ring in hand fit the new headlight visor on the top inside of the ring.
- STEP 8** Once satisfied with the fitment you can reapply the inner ring with the new headlight visor to the light housing and secure it with stock hardware removed in step 5.
- STEP 9** With all the inner hardware fastened to the headlight, plug-in and mount the headlight back in the housing using the stock hardware.

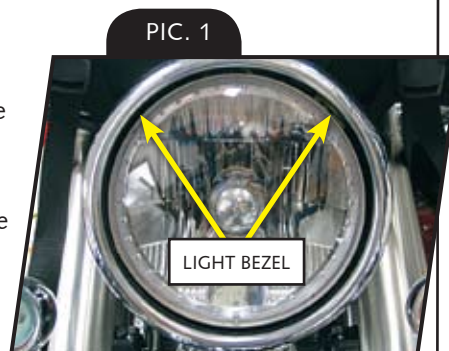

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Kuryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Kuryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Kuryakyn USA® All Rights reserved.

